


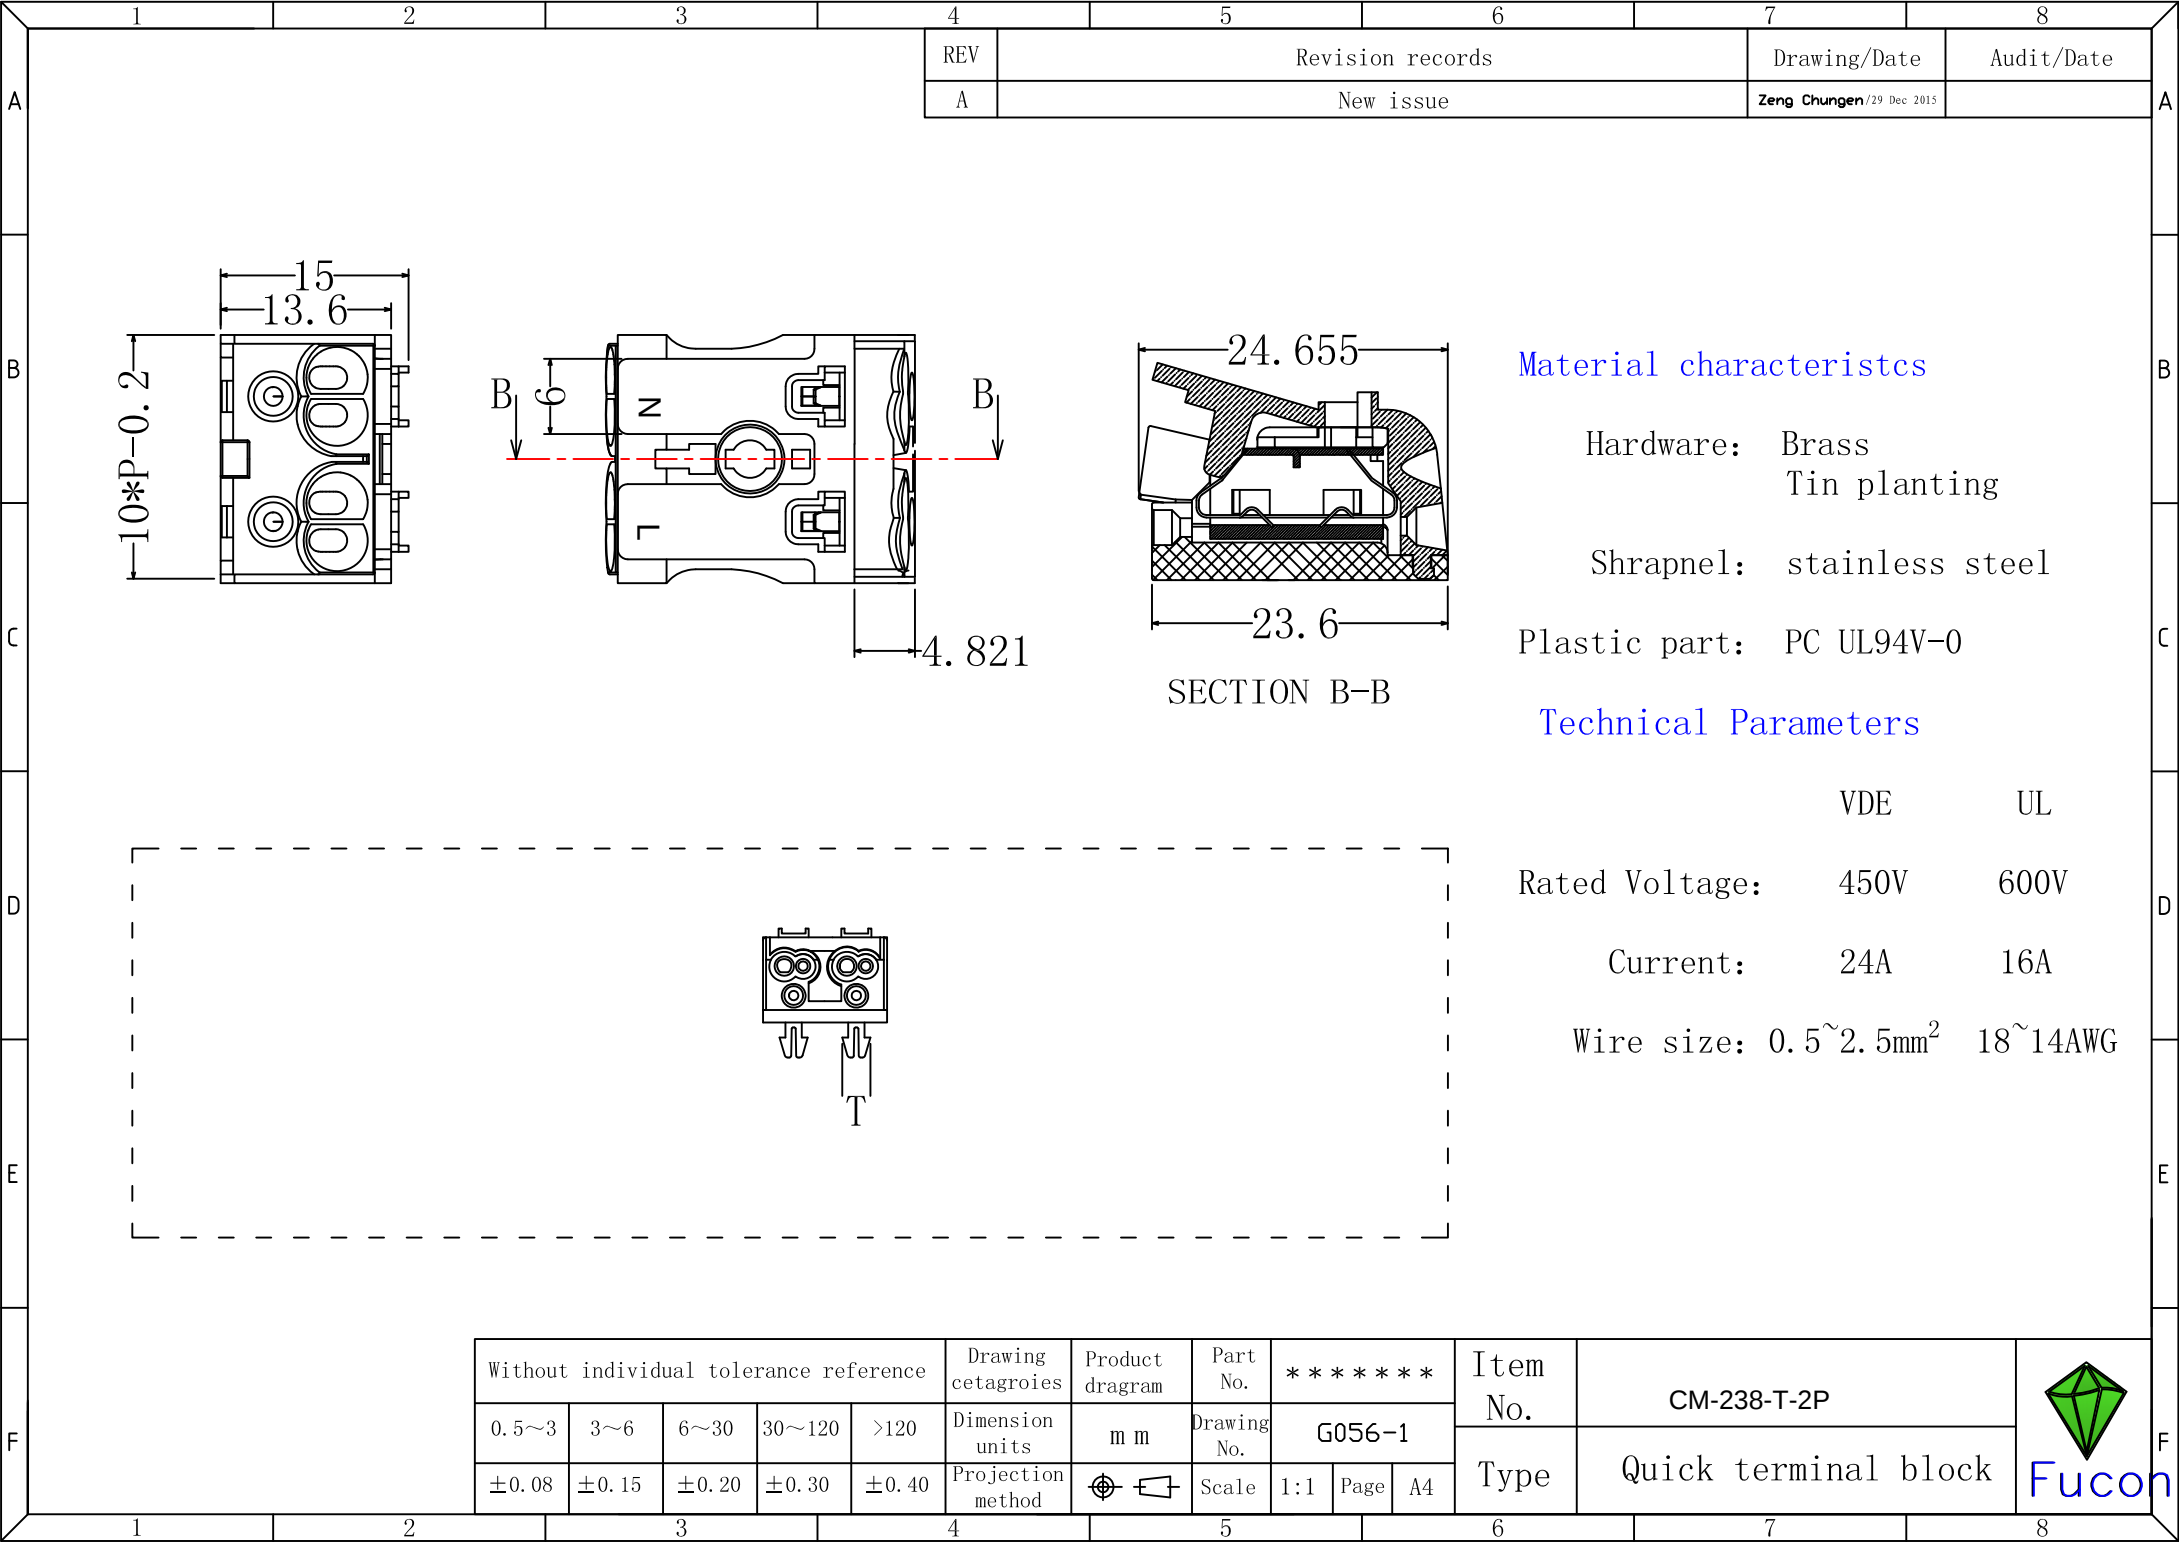

|     |                  |                           |            |
|-----|------------------|---------------------------|------------|
| REV | Revision records | Drawing/Date              | Audit/Date |
| A   | New issue        | Zeng Chungen /29 Dec 2015 |            |

Material characteristics

Hardware: Brass  
Tin planting

Shrapnel: stainless steel

Plastic part: PC UL94V-0

Technical Parameters

|                | VDE                    | UL       |
|----------------|------------------------|----------|
| Rated Voltage: | 450V                   | 600V     |
| Current:       | 24A                    | 16A      |
| Wire size:     | 0.5~2.5mm <sup>2</sup> | 18~14AWG |

|                                        |       |       |        |       |                    |                 |             |        |      |    |          |                      |
|----------------------------------------|-------|-------|--------|-------|--------------------|-----------------|-------------|--------|------|----|----------|----------------------|
| Without individual tolerance reference |       |       |        |       | Drawing cetagroies | Product diagram | Part No.    | *****  |      |    | Item No. | CM-238-T-2P          |
| 0.5~3                                  | 3~6   | 6~30  | 30~120 | >120  | Dimension units    | m m             | Drawing No. | G056-1 |      |    | Type     | Quick terminal block |
| ±0.08                                  | ±0.15 | ±0.20 | ±0.30  | ±0.40 | Projection method  |                 | Scale       | 1:1    | Page | A4 |          |                      |

