

PRODUCT PHOTO



FEATURES



COLOR OPTIONS

2700K



3000K



4000K



5000K



5700K



6500K



10000K



SPECIFICATIONS

Operating Temperature:	30 ~+60°C
Storage Temperature:	-30 ~+60°C
LED Type:	2835 SMD
Input Voltage (DC):	12V
Power:	1.20W
Body Material:	Bottom: ABS Optic: PC
Finishing:	Ultrasonic Welding
Adhesive Tape Brand:	Orafol
Quantity in Strip:	50pcs / Strip

PHOTOMETRY



DIMENSIONS




Anti-Oxidation
Tin-coated Copper Wire


12MM



CUSTOMIZING CABLE DISTANCE

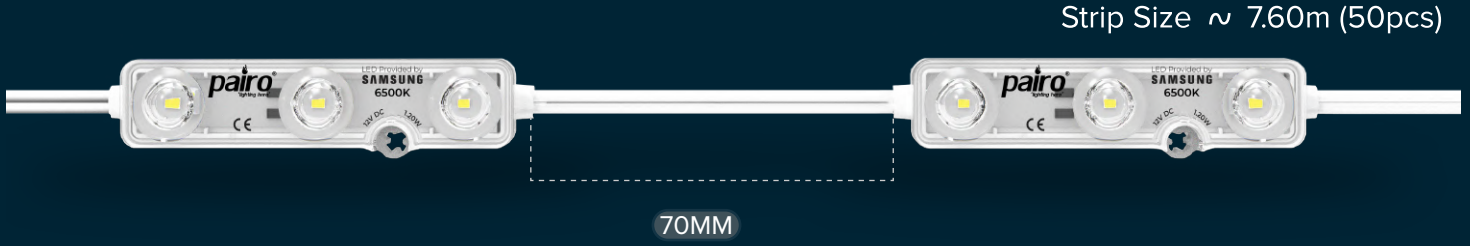

POWER SUPPLY CONNECTION

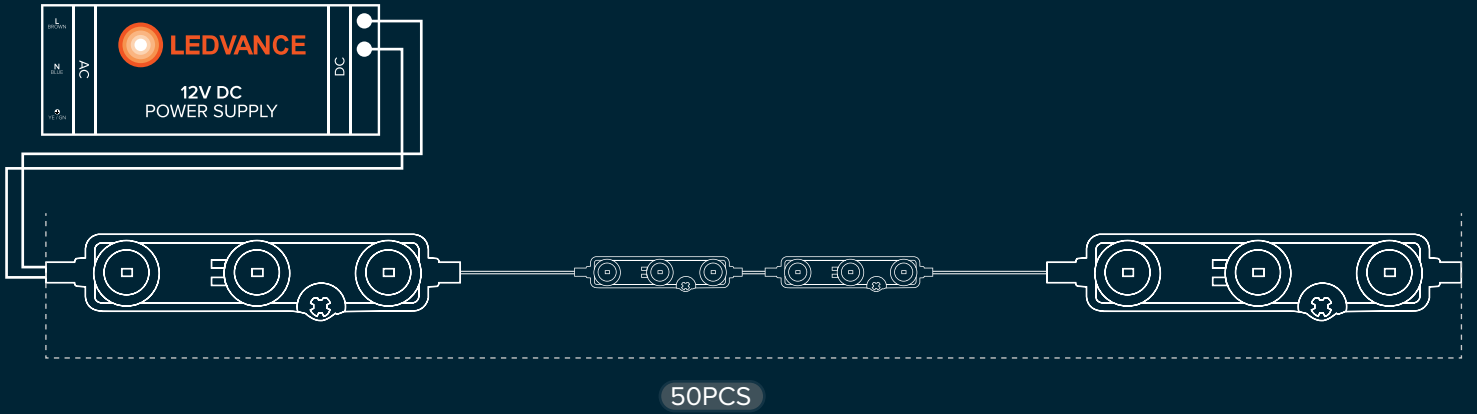

ORDERING INFORMATION

CONSTANT VOLTAGE 12V-1.20W

Order Code	Color	Lumen	Lumen/Watt
PSM03SA120027	2700K	107	89
PSM03SA120030	3000K	113	94
PSM03SA120040	4000K	114	95
PSM03SA120050	5000K	124	103
PSM03SA120057	5700K	124	103
PSM03SA120065	6500K	124	103
PSM03SA120100	10000K	124	103

CODING INFORMATION

P SM 03 SA 072 027

- Kelvin: 027: 2700K /.../ 100: 10.000K
- Power: 072: 0,72W /.../ 150: 1,50W
- LED Brand: SA: Samsung, NI: Nichia, SE: Seoul etc.
- LED Qty: 3
- Family Name: Signage Module
- Brand Name: Païro