

PRODUCT PHOTO



FEATURES



COLOR OPTIONS

2700K



3000K



4000K



5000K



5700K



6500K




10000K




SPECIFICATIONS

Operating Temperature:	30 ~+60°C
Storage Temperature:	-30 ~+60°C
LED Type:	2835 SMD
Input Voltage (DC):	12V
Power:	1.50W
Body Material:	Bottom: ABS Optic: PC
Finishing:	Ultrasonic Welding
Adhesive Tape Brand:	Orafol
Quantity in Strip:	50pcs / Strip

PHOTOMETRY

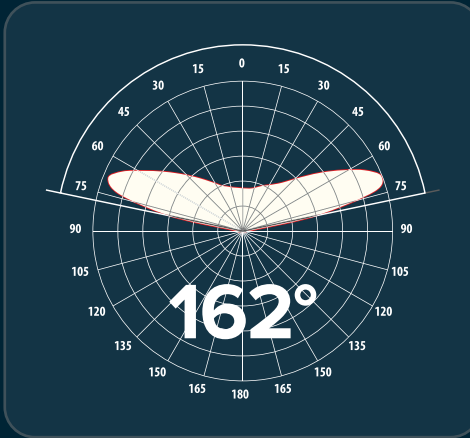


DIMENSIONS

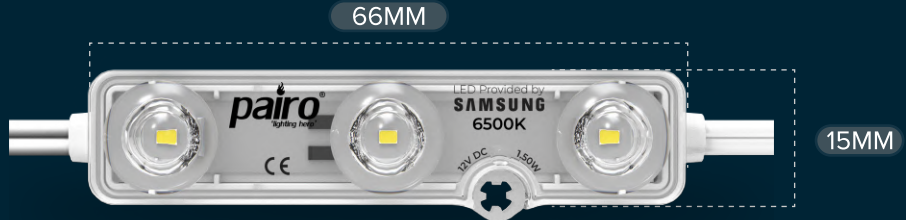


Anti-Oxidation
Tin-coated Copper Wire

12MM

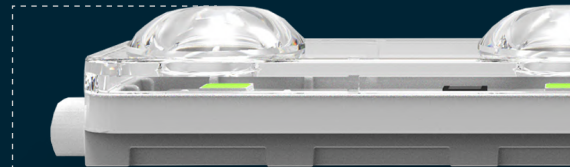


CUSTOMIZING CABLE DISTANCE

Strip Size ~ 7.60m (50pcs)

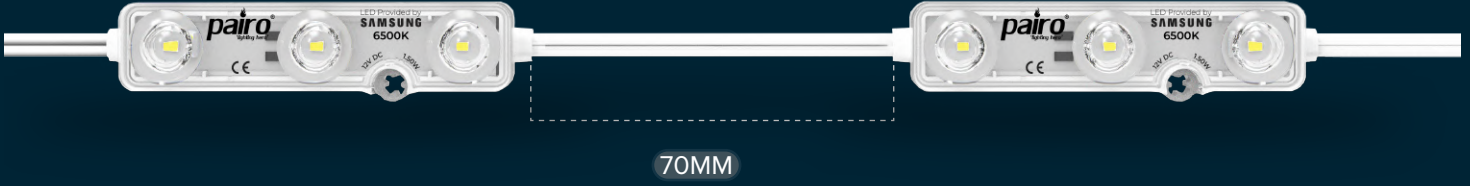

POWER SUPPLY CONNECTION

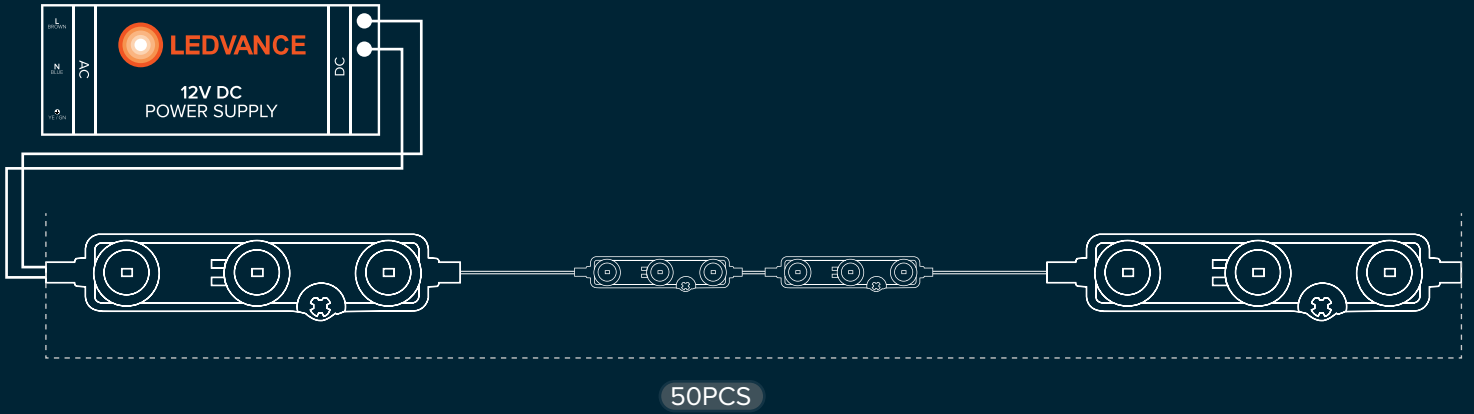

ORDERING INFORMATION

CONSTANT VOLTAGE 12V-1.50W

Order Code	Color	Lumen	Lumen/Watt
PSM03SA150027	2700K	127	85
PSM03SA150030	3000K	135	90
PSM03SA150040	4000K	137	91
PSM03SA150050	5000K	145	97
PSM03SA150057	5700K	145	97
PSM03SA150065	6500K	145	97
PSM03SA150100	10000K	145	97

CODING INFORMATION

P SM 03 SA 072 027

- Kelvin: 027: 2700K /.../ 100: 10.000K
- Power: 072: 0,72W /.../ 150: 1,50W
- LED Brand: SA: Samsung, NI: Nichia, SE: Seoul etc.
- LED Qty: 3
- Family Name: Signage Module
- Brand Name: Pairo