



TUV T8

TUV TL-D 95W HO SLV/25

TUV T8 lamps are double-ended UVC (germicidal) lamps used in professional water and air disinfection units. TUV T8 lamps offer almost constant UV output over their complete lifetime, for maximum security of disinfection and high system efficacy. Moreover, they have a long and reliable lifetime, which allows maintenance to be planned for in advance.

Product data

General Information							
Cap-Base	G13 [Medium Bi-Pin Fluorescent]						
Remarks	Warnings and Safety: A lamp breaking is extremely						
	unlikely to have any impact on your health. If a lamp						
	breaks, ventilate the room for 30 minutes and remove						
	the parts, preferably with gloves. Put them in a sealed						
	plastic bag and take it to your local waste facilities for						
	recycling. Do not use a vacuum cleaner. DANGER: Risk						
	Group 3 Ultra Violet product. These lamps emit high-						
	power UV radiation that can cause severe injury to skin						
	and eyes. Avoid eye and skin exposure to unshielded						
	product. Use only in an enclosed environment which						
	shields users from the radiation.						
Main Application	Disinfection						
Life To 10% Failures (Nom)	7500 h						
Useful Life (Nom)	8000 h						
System Description	High Output						
Light Technical							
Color Code	TUV						
Color Designation	- [Not Specified]						

Depreciation at Useful Lifetime	10 %				
Operating and Electrical					
Power (Nom)	95 W				
Lamp Current (Nom)	0.620 A				
Voltage (Nom)	124 V				
Approval and Application					
Mercury (Hg) Content (Nom)	8.0 mg				
UV					
UV-C Radiation at 100 hr	22.5 W				
Product Data					
Full product code	871150089392540				
Order product name	TUV TL-D 95W HO SLV/25				
EAN/UPC - Product	8711500893925				
Order code	928049804006				
Numerator - Quantity Per Pack	1				
Numerator - Packs per outer	25				
box					
Material Nr. (12NC)	928049804006				


TUV T8

Net Weight (Piece)

233.000 g

Warnings and Safety


Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
TUV TL-D 95W HO	28 mm	1500 mm	1507.1 mm	1504.7 mm	1514.2 mm
SLV/25					

TUV TL-D 95W HO

Photometric data



XDPB_XUTUVTLD-Spectral power distribution B/W

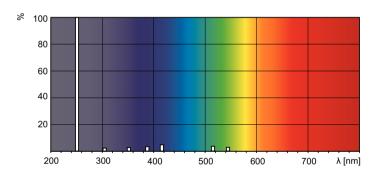

XDPO_XUTUVTLD-Spectral power distribution Colour



© 2020 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2020, April 27 - data subject to change